

1.27mm HEADER FEMALE

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

- DOUBLE ROW
- SIDE ENTRY
- 1.27mm X 1.27mm

SPECIFICATION:

INSULATOR MATERIAL:

GLASS FILLED THERMOPLASTIC
POLYESTER

FLAMMABILITY RATING:

UL 94V-0

OPERATING TEMPERATURE RANGE:

-40° C TO +105° C

MAXIMUM PROCESSING TEMPERATURE:

230° C FOR 30-60 SECONDS
260° C FOR 10 SECONDS

CONTACT MATERIAL:

PHOSPHOR BRONZE

CONTACT RESISTANCE:

20 MILLIOHMS MAX.

CURRENT RATING:

1 A

TESTING VOLTAGE:


125V AC

ORDER INFORMATION:


C613R XX - D - X

1 2 3 4

- 1: SERIES** C613R SIDE ENTRY DUAL ROW
RECEPTACLE WITH 1.27mm X 1.27mm PITCH
- 2: NUMBER OF CONTACTS**
010 TO 050
- 3: CONTACT ARRANGEMENT CODE**
D...DUAL ROW
- 4: CONTACT PLATING**
6...SELECTIVE GOLD FLASH
8...SELECTIVE 15u" GOLD
9...SELECTIVE 30u" GOLD

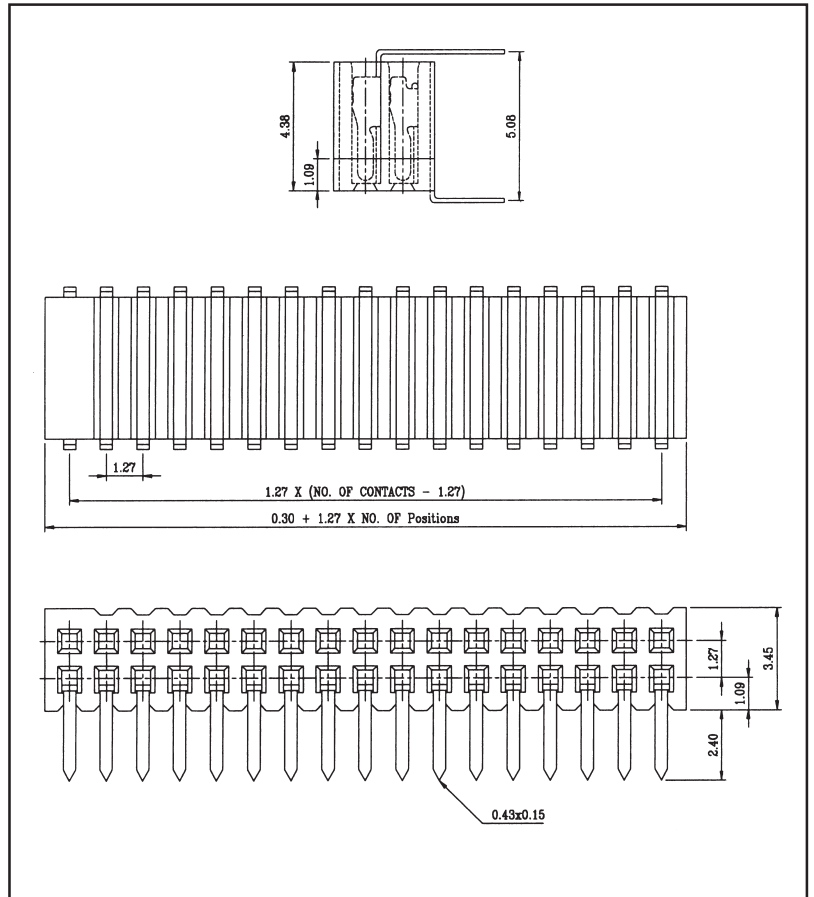

DRAWING

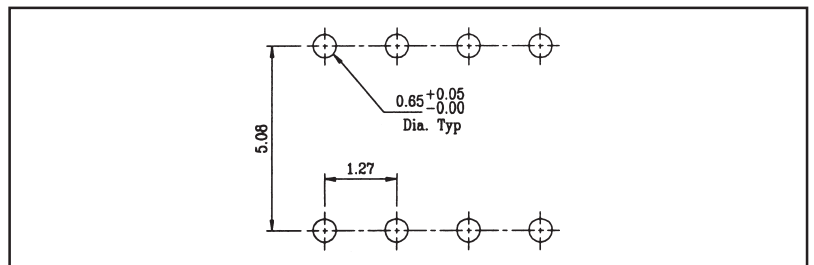

P.C.B. LAYOUT