

2.00mm HEADER MALE

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

- DOUBLE ROW
- DIP TYPE
- RIGHT ANGLE (90°)

SPECIFICATION:

INSULATOR MATERIAL:
GF POLYESTER

FLAMMABILITY RATING:
UL94V-0

INSULATION RESISTANCE:
5000 MEGOHMS MIN.
PER MIL-STD-1344A METHOD 3003.1

OPERATING TEMPERATURE RANGE:
-55° C TO +105° C

DIELECTRIC STRENGTH:
1000V AC MIN.
PER MIL-STD-1344A METHOD 3001.1

CONTACT MATERIAL:
COPPER ALLOYS



PLATING:
REFER TO ORDER INFORMATION

CURRENT RATING:
1 A


CONTACT RESISTANCE:
20 MILLIOHMS MAX.
PER MIL-STD-1344A METHOD 3002.1

DURABILITY:
100 CYCLES
PER MIL-STD-1344A METHOD 2016

SOLDERABILITY:
PER MIL-STD-202F METHOD 208D

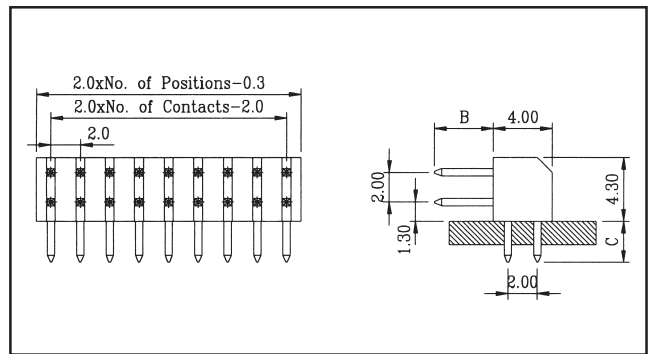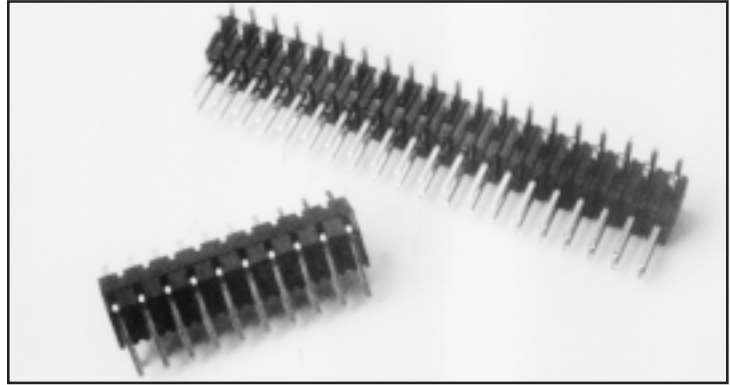

DRAWING

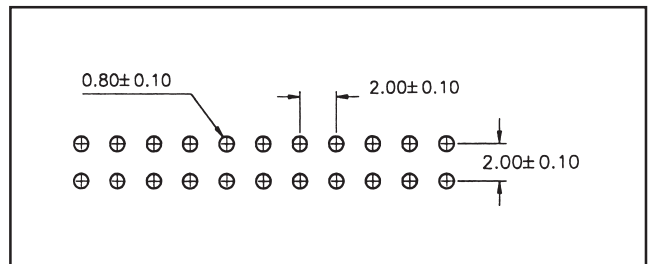

P.C.B. LAYOUT

ORDER INFORMATION:

C6H D L XX - 1 - XX - X
1 2 3 4 5 6 7

- 1: **SERIES** C6H THROUGH BOARD RIGHT ANGLE HEADER
- 2: **CONTACT ARRANGEMENT CODE**
D...DUAL ROW ONLY
- 3: **SOLDER TAIL**
L...RIGHT ANGLE
- 4: **NUMBER OF CONTACTS**
04 TO 64 CONTACTS
- 5: **INSULATOR COLOR CODE**
1...BLACK
- 6: **DIMENSIONAL CODE NUMBER**
SEE CHART ON THIS PAGE
- 7: **CONTACT PLATING**
0...TIN
1...GOLD FLASH
6...SELECTIVE GOLD FLASH
9...30µ" SELECTIVE GOLD

CODE NO.	DIMENSION (mm)	
	B	C
01	4.00	2.80

DIMENSION INFORMATION