





FUTURE BUS FIVE ROW RECEPTACLES

CENTURY INTERCONNECT PRODUCTS


Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com




5 X 6 POSITION



5 X 12 POSITION

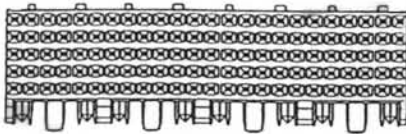

5 X 24 POSITION



5 X 48 POSITION

Number of Positions	Dimensions mm	
	A	B
4 x 6	11.95	10.00
4 x 12	23.95	22.00
4 x 24	47.95	46.00
4 x 48	95.95	94.00
5 x 6	11.95	10.00
5 x 12	23.95	22.00
5 x 24	47.95	46.00
5 x 48	95.95	94.00

Ordering Information

FB2- X-XXX-XXX-X
1 2 3 4 5

- Series: Future Bus female connector.
- PCB Termination...A... Solder Tail
B... Press-Fit
- Number of Rows/Number of columns:

406...4 rows/6 columns	506...5 rows/6 columns
412...4 rows/12 columns	512...5 rows/12 columns
424...4 rows/24 columns	524...5 rows/24 columns
448...4 rows/48 columns	548...5 rows/48 columns
- Number of Contacts:

4 rows: 024, 048, 096, 192
5 rows: 030, 060, 120, 240
- Contact Plating:

6...5μ" selective gold
8...15μ" selective gold
9...30μ" selective gold

Material

LCP, UL94V-0

Contacts: Phosphor Bronze

Plating: 40u" nickel underplate

Selective gold contact area

100u" Tin/Lead press-fit area

Operating temperature: -55° C to +125° C

Electrical

Current rating: 1 Amp max.

Contact resistance: 25 m ohm max.

Insulation resistance: 1000 M ohms min.

