



HIGH DENSITY 4 ROW TRANSITION CONNECTORS

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

■ Mass Termination to .025" Flat Ribbon Cable

ORDERING INFORMATION

C16F XX - X - X
1 2 3 4

1...Series C16F High density 4 row IDC

2...Number of Contacts

30, 50, 68, 80 and 100

3...Color Code

1...Black

4...Plating Options

T...Tin

SPECIFICATIONS

ELECTRICAL:

Current Rating: 1 amp

Contact Resistance: 15 milliohms max.

Insulation Resistance: 500 megohms min.





Dielectric Withstanding: 500V AC for one minute

Operating Temperature: -40 degrees C to +105 degrees C

MECHANICAL:

Contact Material: Phosphor bronze

Insulator Material: Nylon 6T, UL94V-0

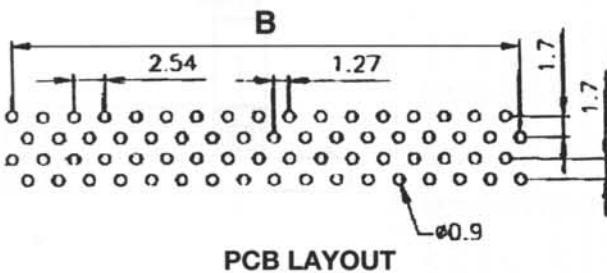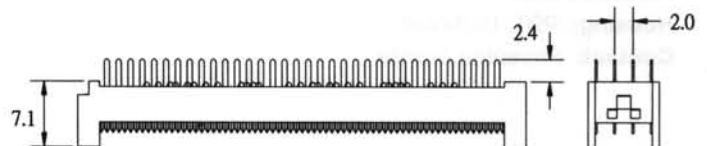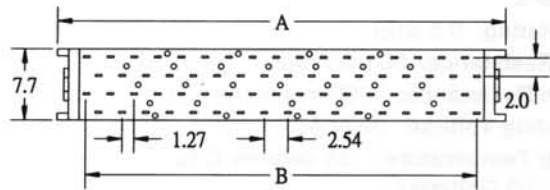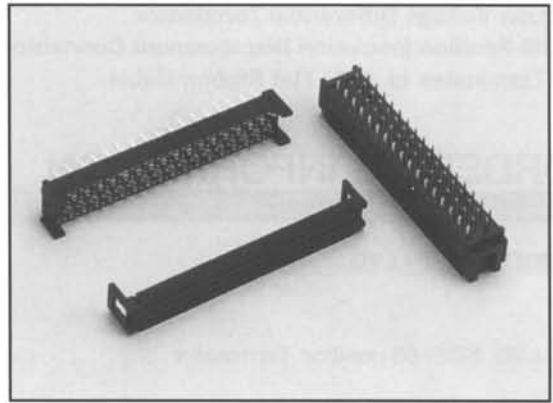

Position	A	B
30	23.83	17.78
50	36.53	30.48
68	47.96	41.91
80	55.58	49.53
100	68.28	62.23