



BOX HEADER, 2.00mm SPACING

CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION

C25H X XX 1
1 2 3 4 5

1...Series C25H Box header, 2.00mm spacing

2...Pin Configuration

S...Straight

R...Right angle

3...Number of Pins


10, 12, 14, 16, 20, 22, 24, 26, 30, 32, 34,
36, 40, 44, 50, 60, 64, 68

4...Color Code

1...Black

5...Plating Options

Blank...Gold flash

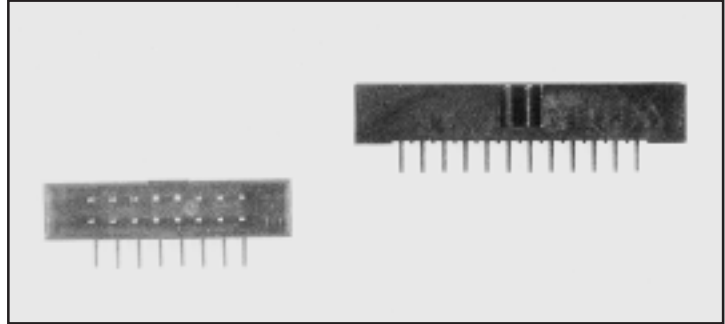

SPECIFICATIONS

ELECTRICAL:

Current Rating: 1 amp

Contact Resistance: 30 milliohms max.

Insulation Resistance: 1000 megohms min.

Dielectric Withstanding Voltage: 500V AC for one minute

Operating Temperature Range: -65 degrees C to
+105 degrees C



MECHANICAL:

Contact Material: Phosphor bronze

Contact Plating: See ordering information

Insulator Material: Thermoplastic polyester, self-extinguishing

Flammability Rating: UL94V-0

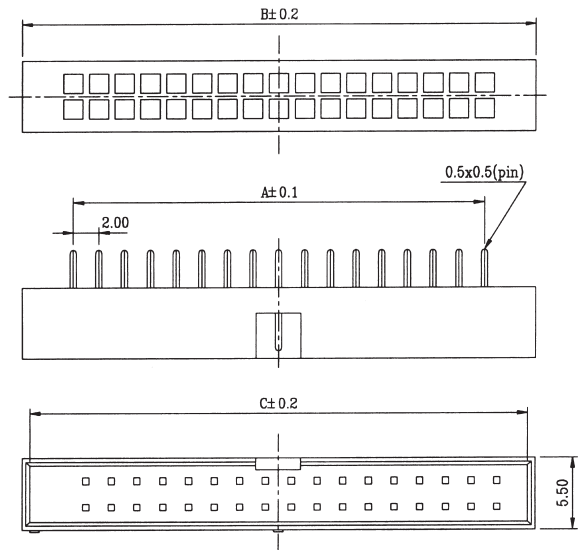

NO. OF CONTACTS	A	B	C	NO. OF CONTACTS	A	B	C
10	8.00	17.10	16.00	32	30.00	39.10	38.00
12	10.00	19.10	18.00	34	32.00	41.10	40.00
14	12.00	21.10	20.00	36	34.00	43.10	42.00
16	14.00	23.10	22.00	40	38.00	47.10	46.00
20	18.00	27.10	26.00	44	42.00	51.10	50.00
22	20.00	29.10	28.00	50	48.00	57.10	56.00
24	22.00	31.10	30.00	60	58.00	67.10	66.00
26	24.00	33.10	32.00	64	62.00	70.10	70.00
30	28.00	37.10	36.00	68	66.00	75.10	74.00