



DIMM SOCKET, 144 PINS

SMALL OUTLINE PACKAGE


CENTURY INTERCONNECT PRODUCTS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

ORDERING INFORMATION




CSOD 144 - X - X - X - X
1 2 3 4 5 6

- 1...Series CSOD Small outline DIMM socket
- 2...Number of Contacts
144...144 contacts
- 3...Voltage Key Dimension
1...3.3 V
- 4...Socket Height from PC Board
2...5.20mm
- 5...Contact Plating
6...Selective gold flash
- 6...Contact Arrangement
Blank...30/42 contact arrangement

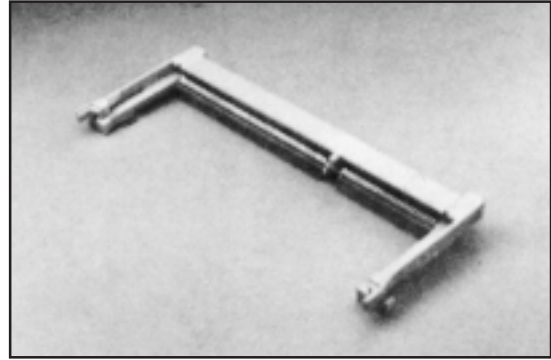

SPECIFICATIONS

- Insulator Material:** High temperature thermoplastic, UL94V-0
- Insulation Resistance:** 250 M min.
- Operating Temperature Range:** -40 degrees C to +85 degrees C
- Dielectric Strength:** 250VAC min.
- Contact Material:** Copper alloy
- Current Rating:** 0.3A
- Contact Resistance:** 35m
- Solderability:** per MIL-STD-202F, Method 208D
- Retention Force:** 450g per MIL-STD-1344A, Method 2007.1

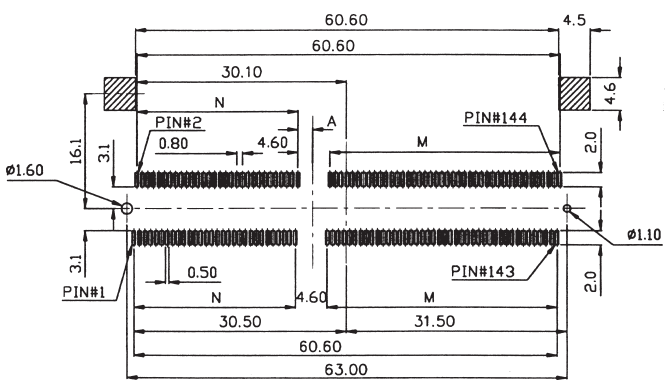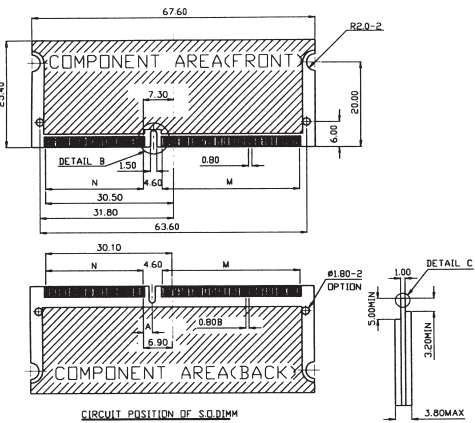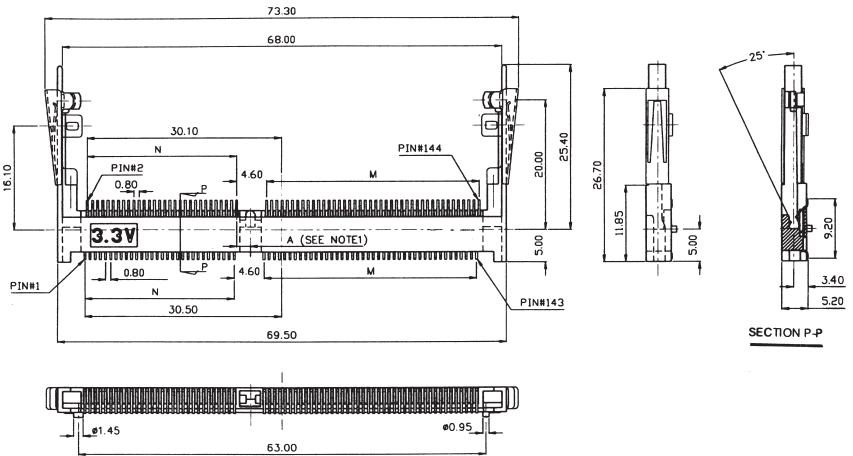

Part Number	DIM. N	Pin No.	DIM M	Pin No.
CSOD144-1-2-6	23.20mm	30	32.80mm	42

NOTE: 1: A=2.10MM FOR 3.3V DRAM