

6

5

4

3

2

1

MATERIAL AND FINISH






Insulator: Impact resistance Polypropylene, UL 94V-HB rated, color black

Contacts & terminals:

PDSN-24-4C (solder lugs): Brass, Nickel plated
Contacts: Spring steel, Nickel plated imbedded in Polypropylene

MECHANICAL SPECIFICATIONS:

Operating temperature: -5°C to +83°C

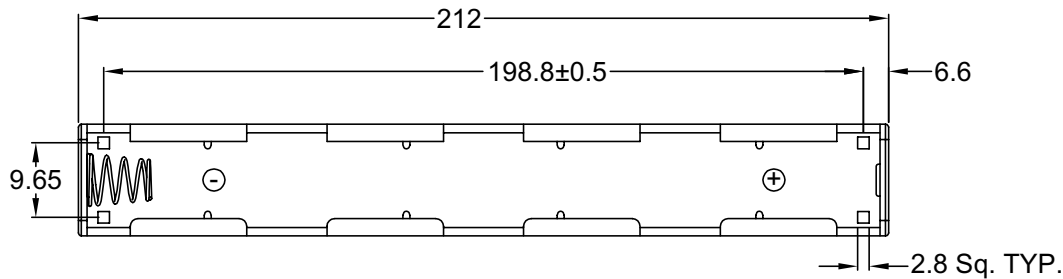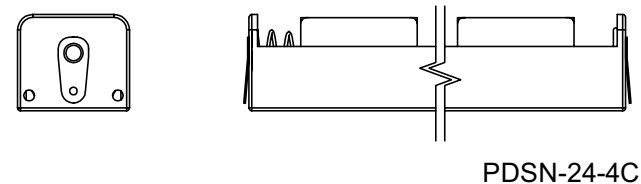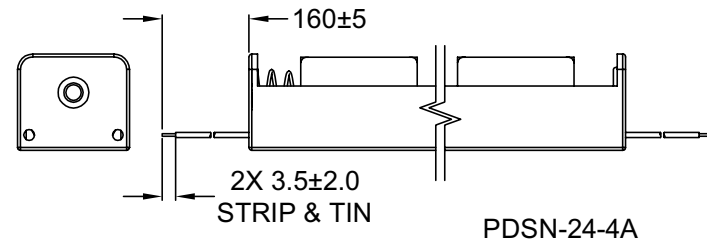

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 4X C SIZE BATTERY HOLDER

DRAWN BY	TD	DATE:	11/20/01
CHECK BY	PB	DATE:	11/20/01
APPR BY		DATE:	

PART #: PDSN-24-4X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	
SCALE: NTS	REV:	

REV	DATE	CHANGE	CHNG	CHK	APPR

6

5

4

3

2

1