

6

5

4

3

2

1

MATERIAL AND FINISH

Insulator: Impact resistance Polypropylene, black, UL-94V-HB rated

PDSN-28-3A (wire leads): PVC, 26 AWG

Contact & terminals:


PDSN-28-3B: Brass, Nickel plated

PDSN-28-3C: Brass, Nickel plated




Spring: Spring Steel, Nickel plated imbedded in Polypropylene

ENVIRONMENTAL:


Operating temperature: -5°C to +83°C

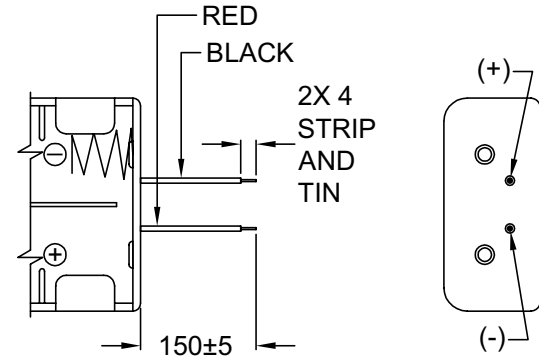

PDSN-28-3A WIRE LEADS

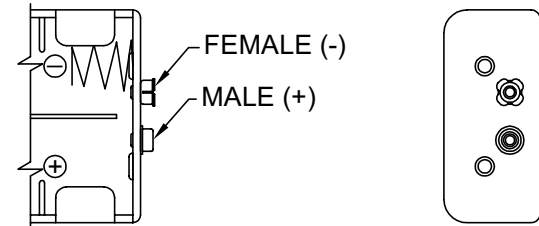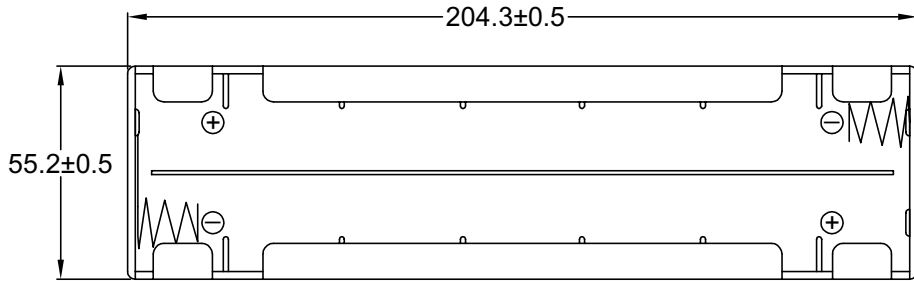

PDSN-28-3B SNAP TERMINAL

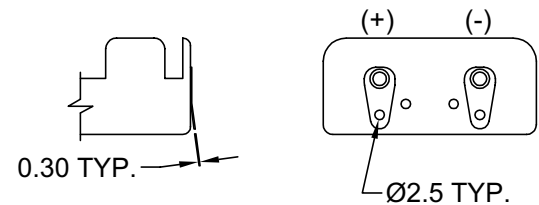

PDSN-28-3C SOLDER LUGS

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

REVISIONS	CHNG	CHK	APPR
	DATE	TD	PB
	CHANGE	TYPE IN CONTACT & TER	REVISED / UPDATED
	REV	DATE	BY
A	4/11/01	TD	PB
B	05/17/02	GQ	PB

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20

DRAWN BY	TD	DATE:	3/28/01
CHECK BY	PB	DATE:	3/28/01
APPR BY		DATE:	

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 8 CELL TYPE "C" BATTERY HOLDER

PART #: PDSN-28-3X		SHEET 1 of 1
SIZE: A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: B
SCALE: NTS		

6

5

4

3

2

1