

6

5

4

3

2


1

MATERIAL AND FINISH


Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Brass, Nickel plated

ELECTRICAL SPECIFICATIONS:


Current rating: 10 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

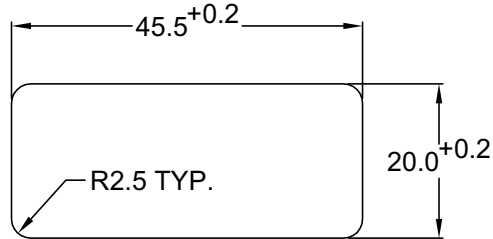

RECOMMENDED PANEL CUTOUT

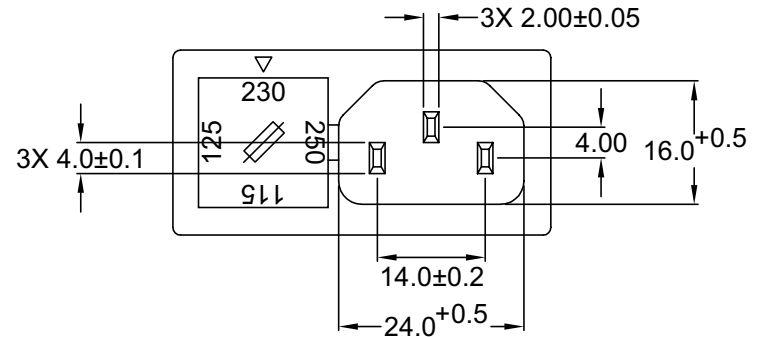

REPLACE WITH CORRESPONDING PANEL THICKNESS

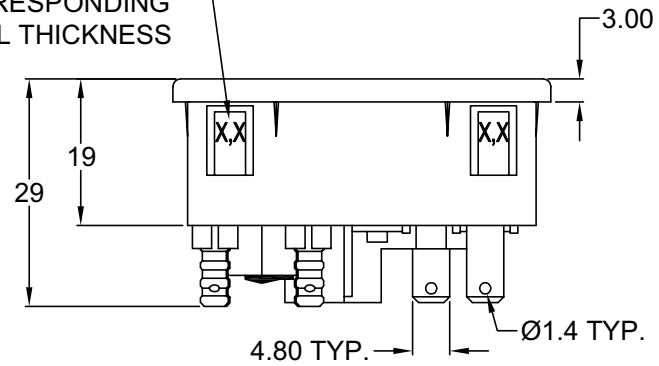

ORDERING CODE:

42R34-3 $\frac{1}{1}$ $\frac{1}{2}$ - $\frac{1}{3}$

1) COLOR

- 1 = BLACK
- 2 = GRAY

2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C
2+GROUND




2 = 10A 250V 120°C
2+GROUND




4 = 10A 250V 70°C
2 POLE



3) PANEL THICKNESS



Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

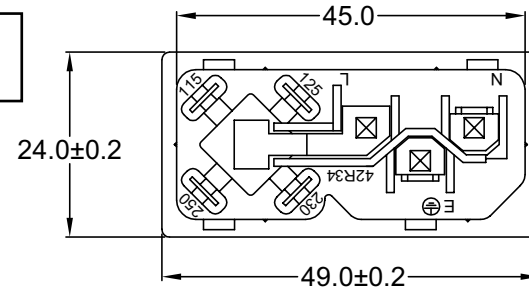

REVISIONS	CHNG	CHECK	APPR
	REV	DATE	

P/N	A	MAX. PANEL THICKNESS
42R34-3X1X-150	1.5	1.5
42R34-3X1X-200	2.0	2.0
42R34-3X1X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	GQ	DATE:	09/14/01
CHECK BY	TD	DATE:	09/18/01
APPR BY	PB	DATE:	09/18/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION FUSE HOLDER; QC TERMINALS; SNAP-IN

42R34-3X1X-XXX

SHEET 1 of 1

SCALE: NTS ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS

6

5

4

3

2

1

6

5

4

3

2


1

MATERIAL AND FINISH


Insulator: Polycarbonate, UL-94V-0 rated
Contacts: Copper, Tin plated

ELECTRICAL SPECIFICATIONS:


Current rating: 10 A
Voltage rating: 250 VAC
Insulation resistance: 100 Mohm min. at 500 VDC
Dielectric withstanding voltage: 2000 VAC for one minute

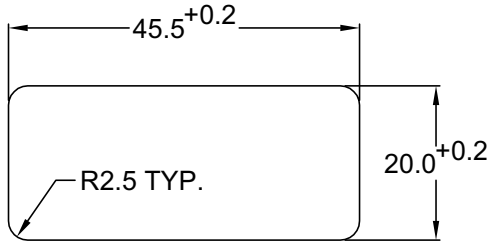

RECOMMENDED PANEL CUTOUT

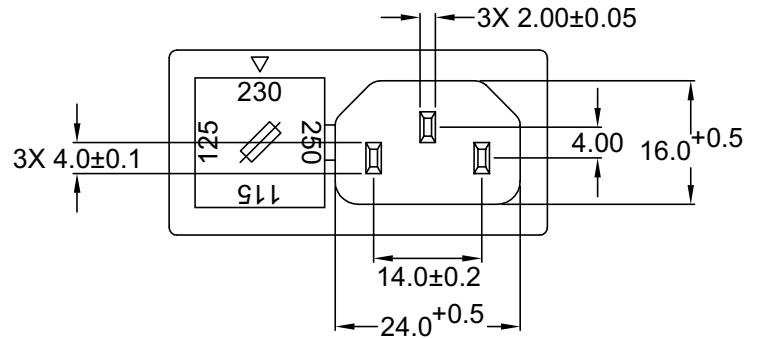

REPLACE WITH CORRESPONDING PANEL THICKNESS

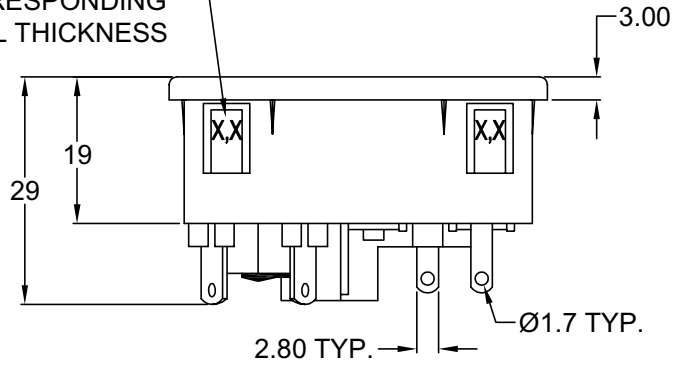

ORDERING CODE:

42R34-3 $\frac{2}{1}$ $\frac{2}{2}$ - $\frac{3}{3}$

- 1) COLOR
1 = BLACK
2 = GRAY


2) ELECTRICAL CIRCUIT CONFIGURATION

1 = 10A 250V 70°C
2+GROUND


2 = 10A 250V 120°C
2+GROUND

4 = 10A 250V 70°C
2 POLE

3) PANEL THICKNESS



Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

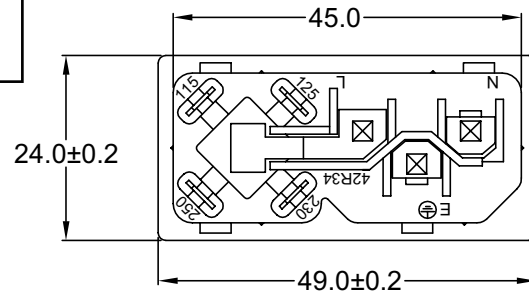

REV	DATE	CHNG	CHECK	APPR

P/N	A	MAX. PANEL THICKNESS
42R34-3X2X-150	1.5	1.5
42R34-3X2X-200	2.0	2.0
42R34-3X2X-250	2.5	2.5

ADDITIONAL PANEL THICKNESS AVAILABLE ON REQUEST

TOLERANCE UNLESS OTHERWISE SPECIFIED	
X	± 1
X.X	± 0.4
X.XX	± 0.20
DRAWN BY	GQ
DATE:	09/13/01
CHECK BY	TD
DATE:	09/18/01
APPR BY	PB
DATE:	09/18/01

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: IEC 60320 APPL. INLET AND COMBINATION FUSE HOLDER; SOLDER TERMINALS; SNAP-IN

42R34-3X2X-XXX SHEET 1 of 1

SIZE: A ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS REV:

6

5

4

3

2

1