MATERIAL:
Nylon 66, UL-94V-2 Rated

ELECTRICAL SPECIFICATIONS:
Rated Current: 5A
Voltage Rating: 250VAC
Insulation Resistance: 1000 Mohm min. at 500VDC
Dielectric Withstanding Voltage: 1000VAC RMS for one minute

ENVIRONMENT:
Operating Temperature: -55°C TO +105°C

NOTES:
1. Replace XX in part number with the number of pins.
2. Requires crimp terminal (PART# TCC-REEL-396).
Mates to PART#'S TCP-0XX-396 & TRP-0XX-396

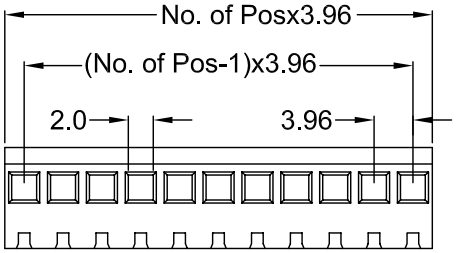

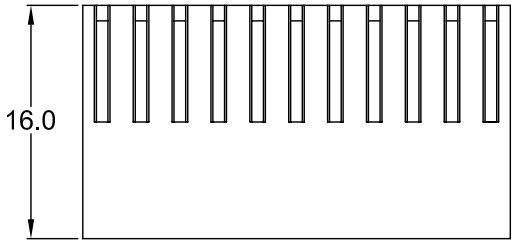



REVISIONS

REV	DATE	CHANGE	CHNG	CHCK	APPR
A	4/18/00	UPDATED DRAWING	PB	TD	JJ
B	2/14/02	REV'D AND UPDATED	TD	PB	

Distributed by Electro-Stock, Inc. sales@electrostock.com
630-682-1542 Fax 630-682-1562 http://www.electrostock.com

TOLERANCE
UNLESS OTHERWISE SPECIFIED

X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	JA	DATE:	5/17/94
CHECK BY		DATE:	
APPR BY		DATE:	

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: HEADER SOCKET HOUSING
3.96mm PITCH; 2 ~ 12 PINS

PART #: TCC-0XX-396

SHEET 1 of 1

SIZE: A
SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: B