


## 20 Amp Subminiature PCB Power Relay

## PC520



### FEATURES

- 20 A at 125 VAC and 16 amps at 277 VAC contact rating
- 1 HP at 125 VAC and 250 VAC
- TV8 rated at 125 VAC
- Class "B" insulation standard
- Class "F" insulation available
- Very economically priced
- Sealed, immersion cleanable
- **Now available Lead Free & RoHS Compliant**

**UL** **us** E93379

### UL/CUR RATINGS

Contact	Normally Open Contact	Normally Closed Contact
<b>Inductive Load</b>	1 HP at 125 & 250 VAC	1/2 HP at 125 & 250 VAC
<b>Resistive Load</b>	20A @ 125VAC 100K Cycles	20A @ 125VAC 30K Cycles
<b>Tungsten Load</b>	TV-8	NA
<b>General Purpose</b>	20 A/125 VAC, 16 A/277 VAC All Contacts	

### CONTACT DATA

<b>Material</b>	AgCdO (Silver Cadmium Oxide)	
<b>Initial Contact Resistance</b>	100 milliohms max @ 0.1A, 6VDC	
<b>Service Life</b>	<b>Mechanical</b>	1 X 10 <sup>7</sup> Operations
	<b>Electrical</b>	1 X 10 <sup>5</sup> Operations

### CHARACTERISTICS

<b>Operate Time</b>	15 ms. Max.
<b>Release Time</b>	10 ms. Max.
<b>Insulation Resistance</b>	1,000 megohms min, at 500VDC, 50%RH
<b>Dielectric Strength</b>	3000 Vrms, 1 min. between coil and contacts 1000 Vrms, 1 min. between open contacts
<b>Shock Resistance</b>	10 g, 11ms, functional; 100 g, destructive
<b>Vibration Resistance</b>	DA 1.5 mm, 10 - 55 Hz
<b>Power Consumption</b>	.36 W
<b>Ambient Temperature Range</b>	-40 to 85 C operating for class B, -40 to 110 C for class F
<b>Weight</b>	10 grams approx.

### ORDERING INFORMATION

Example:	PC520	-1A	-12	S	F	G	-X
Model							
Contact Form	1A, 1B, 1C						
Coil Voltage							
Enclosure	S: Sealed; C: Dust Cover						
Insulation System	Nil: Class B, F: Class F						
Contact Material	Nil: AgCdO, T: AgSnO, G: AgCdO + Gold Plate						
RoHS Compliant	Nil: Not Rohs, -X: RoHS Compliant						




Distributed by Electro-Stock, Inc. sales@electrostock.com 630-682-1542 Fax 630-682-1562 http://www.electrostock.com

**COIL DATA**

Coil Voltage	Resistance ohms $\pm$ 10%	Must Operate Voltage Max. (VDC)	Must Release Voltage Min. (VDC)	Continuous Voltage Max. (VDC)
3	25	2.1	0.3	3.9
5	70	3.5	0.5	6.5
6	100	4.2	0.6	7.8
9	225	6.3	0.9	11.7
12	400	8.4	1.2	15.6
24	1600	16.8	2.4	31.2
48	6400	33.6	4.8	62.4

Note: Custom coil voltages within the ranges shown are available on special order.

**Dimensions in Inches (millimeters)**

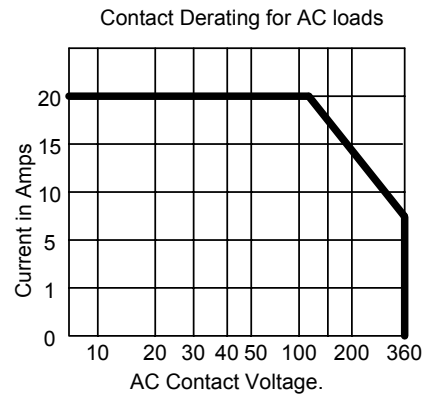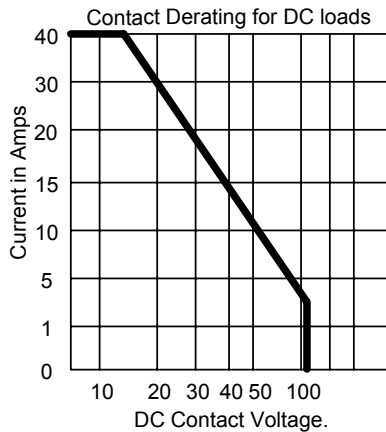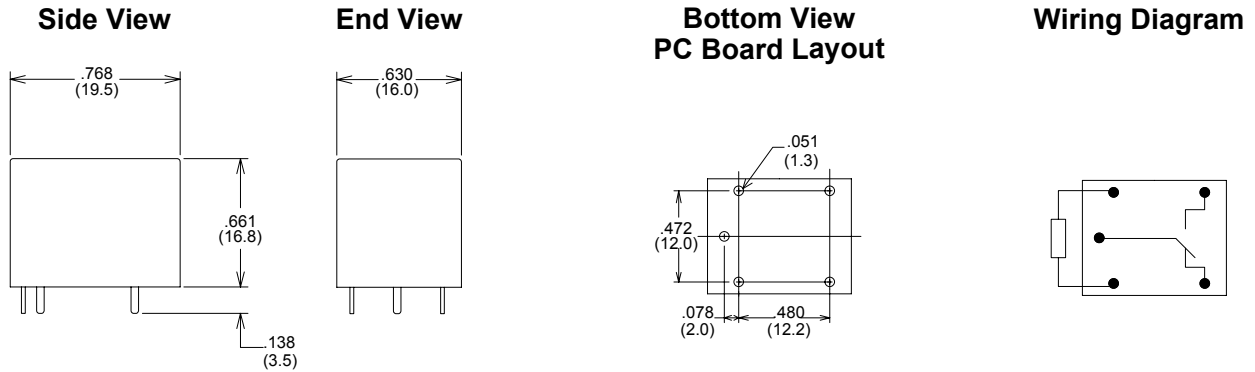

Notes:  
 Contact Form C shown  
 On Contact Forms A & B Unused Pins are Omitted  
 Tolerances  $\pm$  .010 unless otherwise noted



Distributed by Electro-Stock, Inc. sales@electrostock.com 630-682-1542 Fax 630-682-1562 http://www.electrostock.com