

LOCKING PIN HEADER

.100" [2.54] CENTERLINE HEADER WITH LOCK FEATURE



SPECIFICATIONS

Material:


Insulator: Nylon 6/6 thermoplastic, rated UL 94V-0
 Color: Natural
Contacts: Phosphor Bronze

Plating:

100 µin tin-lead over 50 µin copper underplate

Electrical:

Operation voltage: 250 VAC max
Current rating: 3 Amp max
Contact resistance: 15 mΩ max
Insulation resistance: 1000 MΩ min @ 500 VDC between adjacent contacts (75°F and 50% R.H.)
Dielectric withstanding voltage: 1000 VDC min rms (sea level)

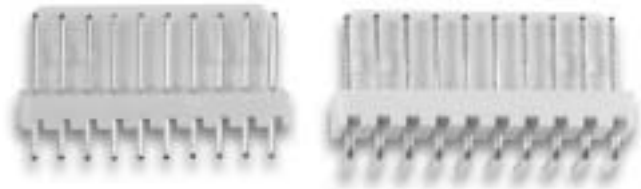


ORDERING INFORMATION

choose one from each category as shown in sample below

LHJ Series	10 Positions	S Mounting Angle
LHJ - .100" Locking Pin Header	02 thru 20	S - Straight
CHJ - .100" Crimp Contact Housing		R - Right Angle
CHJ-C-X - Crimp Contact 28-22 awg.		H - Reverse Right Angle


LHJ - XX - S

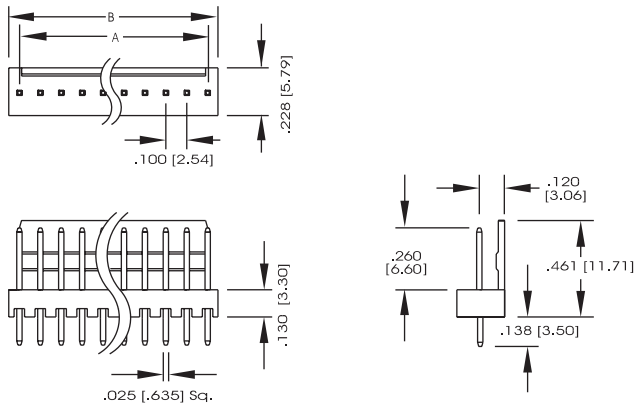

LHJ - XX - H



LHJ - XX - R

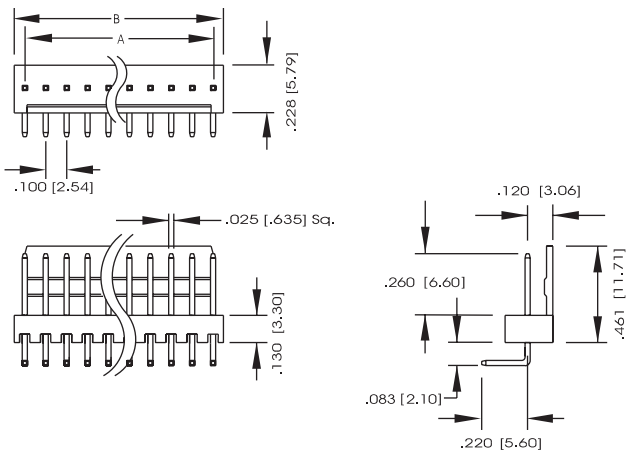

CHJ - XX

